

WeFloor 2.0

ULTIMATE LUXURY VINYL FLOOR



MADE IN KOREA


- Best Quality Raw Materials
- Superior Chemical Resistance
- Low Maintenance - No Wax Required
- Highly Scratch, Wear, Dent Resistant
- Extremely Low VOC's
- Clean and Healthy Indoor Air
- Environment Friendly - Eco Label
- Great Dimensional Stability
- 100% Recyclable
- Variety of Designs
- Easy Installation
- Made in Korea



AREAS OF APPLICATION

Hospitality | Housing | Offices & Corporate | Retail | School
Age Care Center | Healthcare | Banks | Gym
Club & many more...

WE HAVE SERVED

and many more...

OUR PRODUCTS

The space becomes more beautiful with WeFloor 2.0

Dry Back

The Basic is the best

Create special space with differentiated design and pattern of WeFloor 2.0 LVT Dry back Tile. Dry Back makes your space beautiful.

Patterns are available in Wood, Fabric/ Carpet/ Stone & Abstract designs.

- 2 mm / 0.3 mm Wear Layer



Creates special space with differentiated design and pattern



Providing high stability and comfortable walking




Strong at dent and scratch



Easy cleaning and maintenance with special surface treatment



Maintaining eco friendly space with no harmful chemicals

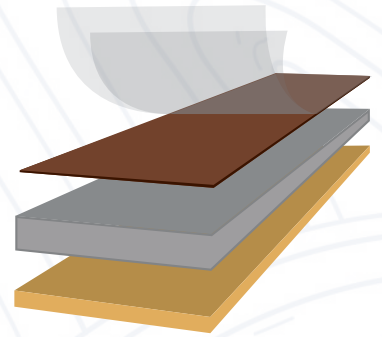

WOOD COLLECTION

Dry Back 2 mm / 0.3 mm Wear Layer
177.8 mm x 1219.2 mm | 22 pcs./box (4.77 sqm)



VWP-320



VWP-308



VWP-904



VWP-811



VWP-506



STONE/CONCRETE COLLECTION

Dry Back 2 mm / 0.3 mm Wear Layer

470 mm x 470 mm | 22 pcs./box (4.86 sqm)



VCT-704




VCT-901



VCT-104





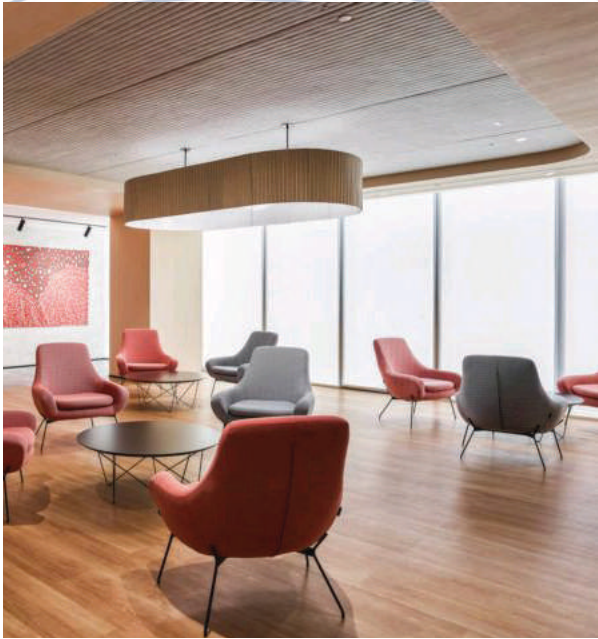

TECHNICAL SPECIFICATIONS

Description		Dry Back 2 mm / 0.3 mm Wear Layer
Total Thickness	ASTM F 386	2 mm
Wear Layer		0.3 mm
Plank Size	ASTM F 2055	177.8 mm x 1219.2 mm (4.77 sqm)
Tile Size		470 mm x 470 mm (4.86 sqm)
Bevelled Edge		No
Classification	EN ISO 10582 EN ISO 10582	22: Domestic General 32: Light Commercial
Reaction to Fire	EN13501-1 EN ISO 11925-2 EN ISO 9239-1	B _{fl} - S1 Pass Pass
Resistance to Chemicals	EN 423 ASTM F 925	Class 0 Pass
Resistance to Light	EN ISO 105-B02 ASTM F 1515	≥6 <8
Wear Resistance	EN 660-2 ASTM F 510	Wear Group : T
Dimensional Stability	EN 434 ASTM F 2199	≤0.25% Pass
Static Electrical Propensity	EN 1815	Voltage: 0.5 kV
Residual Indentation	EN 433 ASTM F 1914	≤0.1 mm <8%
Anti-slip Property	DIN 51130	R10
VOC Emission	ISO 16000	A+
Phthalates	EN 14372 CPSC-CH-C-1001-09.3	N.D. Pass
Castor Chair continuous use	ISO 4918	Pass
Squareness	ASTM F 2055	Pass
EN 14041	-	-
Limited Warranty	-	5 Years - Residential 3 Years - Commercial

For care, maintenance and installation, refer company website.
All Pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.



011-49043159

www.weclic.in