



WOVEN

VINYL
FLOORS

VIBRANT
RECREATING FLOORING





Vibrant Floors offers wide range of woven vinyl floors.

Our flooring offers the texture and warmth of a woven, natural fiber with the practicality of a robust contract flooring. Our goal is to provide innovation into today's commercial and residential floorings proposition with a new generation type of flooring. The innovative woven vinyl and fiber glass flooring with quality polyvinyl chloride base, which makes product remarkably robust, very functional and elegant.

Woven Vinyl is favorite selection amongst esteemed architects, interior designers and contractors worldwide for multiple application areas for indoors.

application areas



Office & Corporate



Shops



Bank



Residential



Auditorium



Gym



School



Public Area



Hospitality


ethnic collection

ROLL

Ethnic Cream




Ethnic Brown

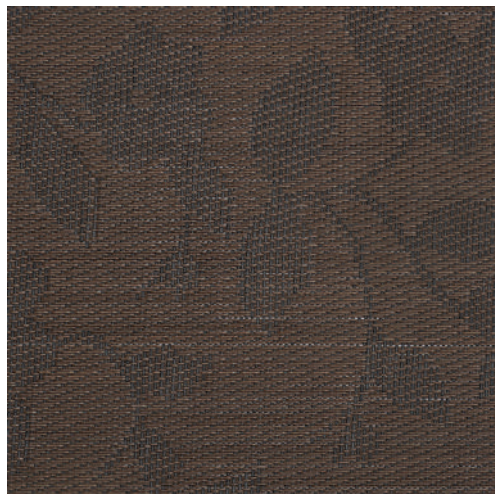

herringbone collection

ROLL

Herringbone Blue

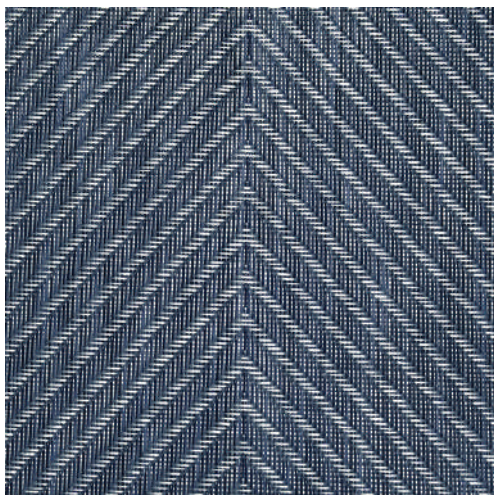

Herringbone Coffee




jaquard collection

ROLL

Jaquard Silver



Jaquard Brown

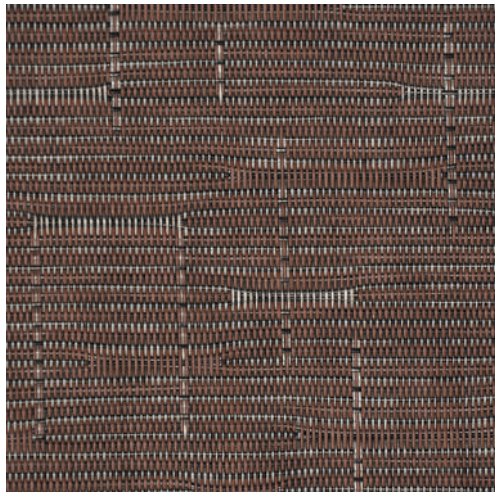

sahara collection

ROLL

Sahara Silver




Sahara Dark




weave
collection

ROLL

Weave Bombay

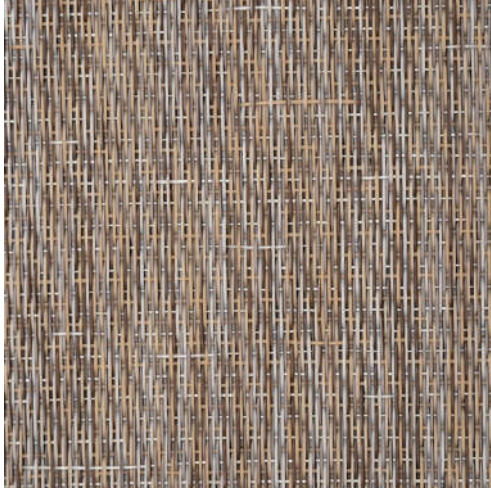


Weave Sand

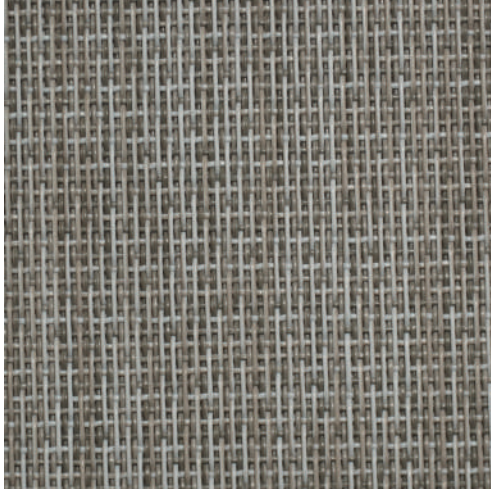

Weave Moonlight




Weave Charcoal

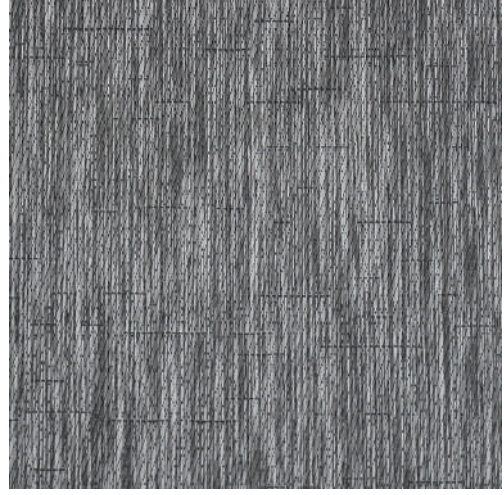

fantasy collection

ROLL


Fantasy Silver

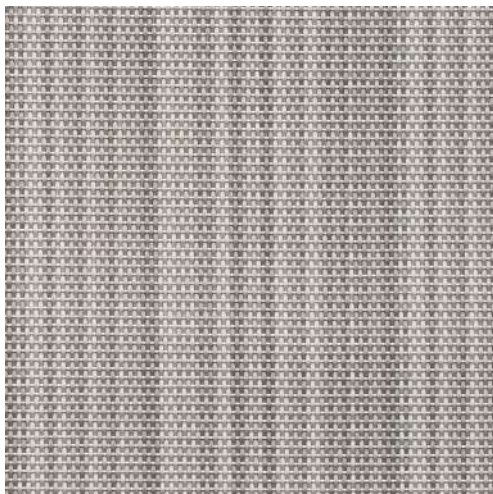


Fantasy Navy



Fantasy Royal

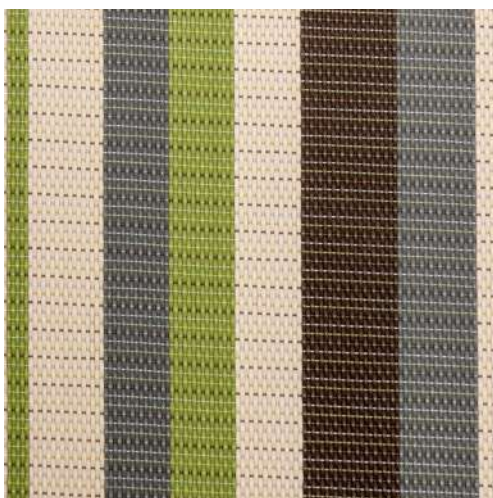

Fantasy Orange

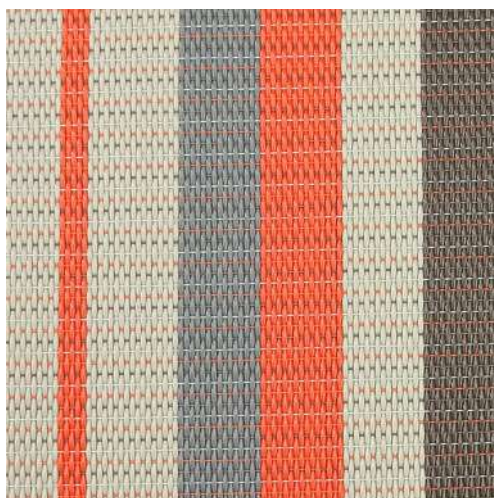

festival *collection*

ROLL

Festival Mustard




Festival Turquoise




botanic *collection*

ROLL

Botanic Cilia

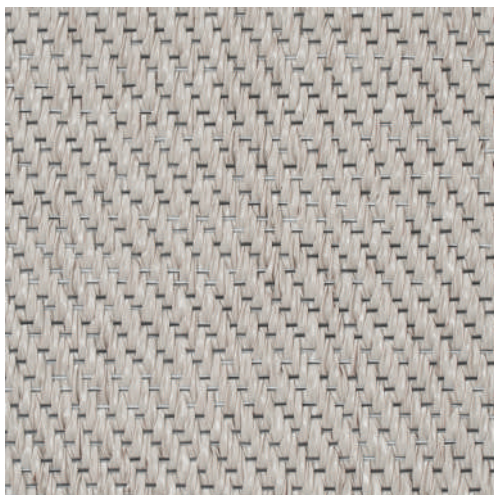


Botanic Dark

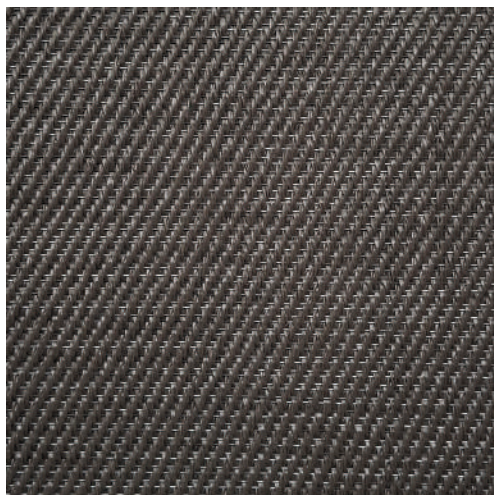


element collection

ROLL

Element Silk

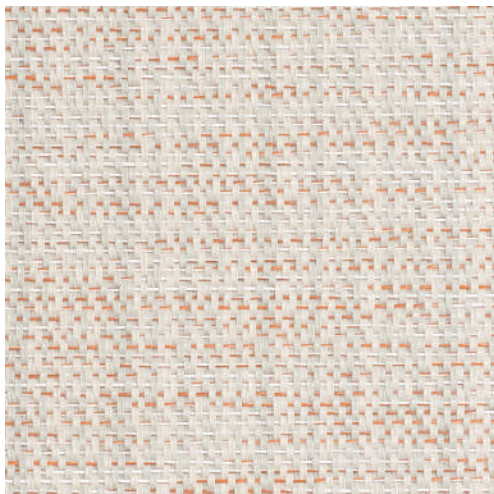


Element Grey

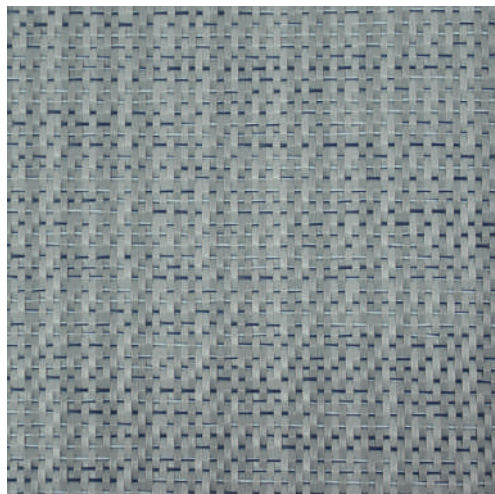


silence collection

ROLL

Silence Coffee

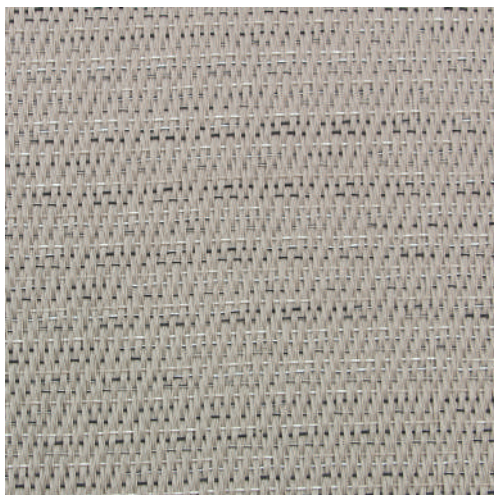

Silence Fossil

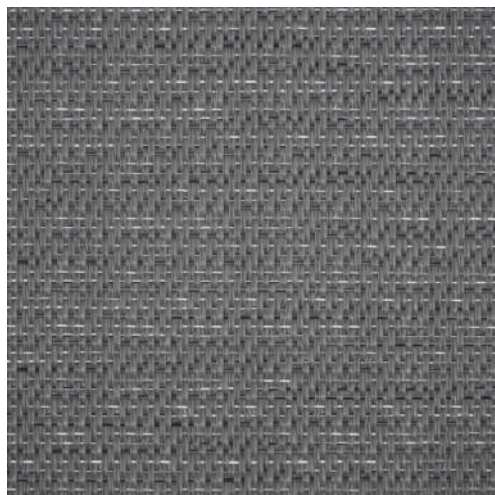



Speciality Auditorium Floors

Aesthetics and acoustics are one of the most commanding rules in the process of designing an auditorium. Due to the anticipated presence of a large gathering of people, it is necessary to make sure that the flooring is comfortable and prevents any accidents caused by friction.

Vibrant floors woven vinyl with rich weave texture and aesthetic of fabric/carpet floor looks ultimate designer floor covering for areas like auditoriums, home theaters etc. Vibrant floors woven vinyl having minimal maintenance with stain free, sound absorbent and bacteria free property.

The new generation floor covering material plays a significant role in cinema safety as the material is anti slippery, odor free too. Special comfort and sound absorption backing adds additional sound absorption and contributes towards better functionality of the auditorium. The new generation auditoriums deserve new generation floor coverings too and the search end with Vibrant Floors woven vinyl.





installation

REQUIREMENTS



1. The Vibrant Woven Vinyl Flooring is better to be installed by a professional installer.
2. The sub-flooring should be clean, dry and without cracks.
3. The best installation temperature must be higher than 15 centi-degree and the relative humidity not higher than 80%. A room temperature between 18°C (65°F) and 25°C (77°F).

PREPARATIONS

1. Cutting tools: Shovel/Safety knife/Cutting knife/Trowel
2. Cleaning tools: Vacuum/Mop cloth/Shoe cover/Mop/Broom
3. Glue: PVC glue/Cold welding liquid
4. Other tools: Sand/Heavy roller/Carpenter's ink market/floor rule/Scotch tape



INSTRUCTIONS (ROLLS)

1. Apply self levelling compound, 24 hours prior to installation. This compound is then grinded and vacuum cleaned. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture.
2. Roll the floor covering out, overlapping for about 5 cm and leave 24 hours to acclimatize. As P1
3. Fold the back over half of their length (or width) draw a mark as start for the PVC glue application. Lay the Vibrant Woven Vinyl Flooring on the wet glue and use the heavy roller to remove all air bubbles.
4. Use the cold welding liquid to weld the seams, prior to that put the scotch tape on the carpet, cut the tape using the seam. Then fit the seam by cold welding liquid. As P2
5. After few minutes, check the result.

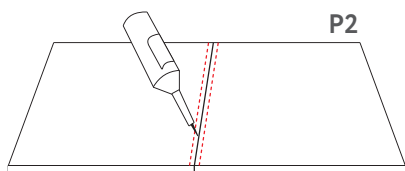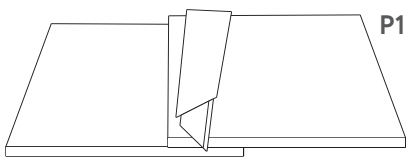

INSTRUCTIONS (TILES)-

1. Apply self levelling compound, 24 hours prior to installation. This compound is then grinded and vacuum cleaned. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture.
2. Leave the tiles 24 hours to acclimatize.
3. Measure the center of room and mark a line for the PVC glue application. Lay the Vibrant Woven Vinyl Tiles on the wet glue and use the heavy roller to remove all air bubbles. As P3 / P4
4. After few minutes, check the result.

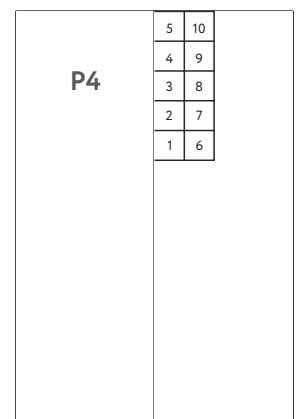

care & maintenance

VIBRANT WOVEN VINYL FLOORING CARE AND MAINTENANCE

There should always be a well-functioning entrance system to ensure the majority of the dirt stays there. 85% of the dirt comes from the outside.

MECHANICAL CLEANING

1. Vacuum clean the flooring.
2. Clean the flooring with a scrubber-dryer machine with "soft" brush rollers. Use warm to the touch water with the minimum dose of all-purpose cleaner (PH7-8.5), to avoid having to rinse the flooring afterwards. It is an advantage to drive in the carpet's longitudinal direction.

MANUAL CLEANING

1. Vacuum clean the flooring.
2. Use a scrubbing brush on a shaft. Dip the scrubbing brush in a bucket with warm to the touch water/all-purpose cleaner solution, PH 7-8.5, and scrub the floor.
3. Suck up the water with a wet vacuum cleaner, or dry the floor with soft cloth/micro-fibre cloth.

STAIN REMOVAL

Stains should be removed as soon as possible. When using a stain remover, check with the manufacturer that should not damage vinyl flooring. Use a scrubbing brush and always rinse with water.

Special : For chewing gum use - 1. Icy-spray, 2. Spot Eliminator



TECHNICAL INFORMATION			ROLLS	TILES
Classification		EN 685	33	33
Weight		ISO 8543	2.7-3.1kg/m ²	3-3.5kg/m ²
Thickness		ISO 1765	2.5mm-2.8mm	2.5mm-2.8mm
Roll Length		EN 426	20m	-
Roll Width		EN 426	2m	-
Tile Dimension		EN 994	-	50x50cm
Dimension Stability		ISO 2551	< 0.25%	< 0.25%
Curvature		EN 434	< 2mm	< 2mm
Caster Chair		EN 985	Continuous use	Continuous use
Body Voltage		ISO 1815	≤ 2.0KV	≤ 2.0KV
Thermal Resistance		ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating
Colour Fastness to Light		ISO 105-B02	> 6	> 6
Anti-slip property		EN 13893	> 0.3	> 0.3
Reaction to Fire		EN13501-1	Bfl-s1	Bfl-s1
Sound Acoustic		11 dB		
Smoke Density		ASTM E662	< 450	< 450
REACH Test		1907/2006	NO.(6614)008-1228-R2	
CE Certification		EN14041 EN15114	NO. EC. 1282.OA140305.AYD0738	
ISO 9001 Certification		ISO 9001:2008	NO. 04514Q20096R0S	
ISO 14001 Certification		ISO 14001:2004	NO. 04514E20029R0S	



**Sound
Absorbent**



Anti-bacterial



**Unique &
Limitless
Designs**



**Stain,
Water & Oil
Resistant**




**Easy
Installation**



Hygienic

The product images shown in this brochure are for illustration purposes only and may not be an exact representation of the product. Vibrant Floors reserves the right to change product images and specifications at any time without notice.

our esteemed clients





WE ALSO OFFER
WOVEN VINYL WALLCOVERING | LUXURY VINYL TILE (LVT)



VIBRANT FLOORS PRIVATE LIMITED

A-76, 2nd Floor, DDA Shed, Okhla Industrial Area, Phase-2, New Delhi - 110020

☎ 011-49043159

✉ info@vibrantfloors.in 🌐 www.vibrantfloors.in

NEW DELHI • MUMBAI • BENGALURU • CHENNAI • HYDERABAD • AHMEDABAD
KOLKATA • SURAT • PUNE • JAIPUR • LUCKNOW • LUDHIANA