WOVEN VINYL FLOORS



www.vibrantfloors.in



Vibrant Floors offers wide range of woven vinyl floors. Our flooring offers the texture and warmth of a woven, natural fibre with the practicality of a robust contract flooring. Our goal is to provide innovation into today's commercial and residential floorings proposition with a new generation type of flooring. The innovative woven vinyl and fiber glass flooring with quality polyvinyl chloride base, which makes product remarkably robust, very functional and elegant.

Woven Vinyl is favorite selection amongst esteemed

architects, interior designers and contractors worldwide

for multiple application areas for indoors.



APPLICATION AREAS



Office & Corporate



HOTEL

Hospitality



find

Shops





Residential



Public Area

ethnic COLLECTION





Ethnic Cream



Ethnic Black






collection



Chroma Brown







natural COLLECTION



Natural Slate



Natural Brown



Natural Uno





fantasy COLLECTION



Fantasy Silver



Fantasy Grey



Fantasy Royal



Fantasy Orange

нннннн	*******		
(新始新新的方面	AAAAAAAAA		AHAHHHHHHH
NNNNNN	AMAGE AND A	STATISTICS AND A REPORT OF A REPORT	HHHHHHHH
innnnn n	UNUTATION AND A DECIMAL OF A		REPERT NO. CONTRACTOR NO.
REPERCENT	C C C C C C C C C C C C C C C C C C C		
in the second second	НИНИНИИ	新新新教授教育教育的利用利用。	HHHHHHH H H H HH H H H H H H H H H H H
SURVER T	TEACHERNER		NHH H H H H H M M M M M M M M M M
CALCULATE STATE	*******		A RA RA RA WARRANT AND A RANGE
UVUUUUU	нининини	网络新加加和加加加加加州州州州	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
MARKER	WHEN THEN HE	IN A REAL PROPERTY AND IN A REAL PROPERTY AND	A TOTAL TOTAL TANK AND A TOTAL
NUMBER	*****		
ныныны	нининини	的复数的复数利用利用用用用用用用用用用用用用用用用用用用用用用用用用用用用用用用	NAAAAAA SI
TR. T. T. F. F.	111111111111111	PROVIDENT PROPERTY AND A PROPERTY AN	
нынынын	нннннни		J J J J J J J J J J J J J J J J J J J
нинини	нининини	Nanananananana.	
以利用利用利用	RANNANNA		HHHHHHHHHH
нанинна	nnnnnnn	PUPUPUPUPUPUPUPUPUPUPUPUPUPUPUPUPUPUPU	
ннинии	HANAAAAAA		
NHHHHH	hinnnnnnn i		HHHHHHHHHH
<u>unnnnnn</u>	กกกกกกก	UWU UUUUUU UUUUUU	
nanann	NRABARA		THE REPORT OF THE PARTY OF THE PARTY.
17/1/1/1/1/1	VUUVUVUVU		
nanana		网络新新新新新新新 新新新新新新新	HHHHHHHHMMPERIN
innnn III	ADADADAAAAAA		另另外分开另 开 的 的 的内的内侧
AN WWWWWWW			H.H.H.H.H.H.H.F.H.H.H.H.H.H.H.H.H.H.H.H
L'ALALAN .		同新新新新新新新新新开外外外州州	H H H H H H H H H H H H H H H H H H H
MACHER H	HHMMMMMM		RAMMANA DECEMPERATE
NNNNNN	ККИМИНИКИ		THE REPORT OF THE PARTY OF THE
HHHHHHH	нининини	其其其其其其其其其其其其其其 其其其	Whannana and a second
NMMMHER	计长时后的历历方式	THE REPORT OF A DURATE	A DALANA A DALAR A DALA
CENTRESPONDENCE	нининини		
нинини	-нананана	HARAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA	
REARING	RESERVENCE	THE REPORT OF THE PARTY OF THE	VVVVVVVV HEILER HEILER
нининны		and a second second second	
HMMMMMM	HARAAAAAA		ALCH MUSIC STREET
TOTAL TAR	nnnnnnnn	THE REPORT OF THE PARTY OF THE	HHHHHHHHHHHHHHHH
RARARAR	на на кака к	annananan an	1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 2
HAMMANN	ากกกกกกกก		
IN THE PROPERTY OF	nnnnnn	UNANANANANAN	NHARAAR BUTTONIST
nnnnnn	anna nann		HHHHHHHHHH
Innnnnn	กกกกกกกก		HHAHAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
nannann	mmmmm		HHHHHHHHHHHH
CALL & MARKED	and a second sec		



festival COLLECTION



Festival Mustard



Festival Turquoise





silence COLLECTION




Silence Coffee



Silence Fossil



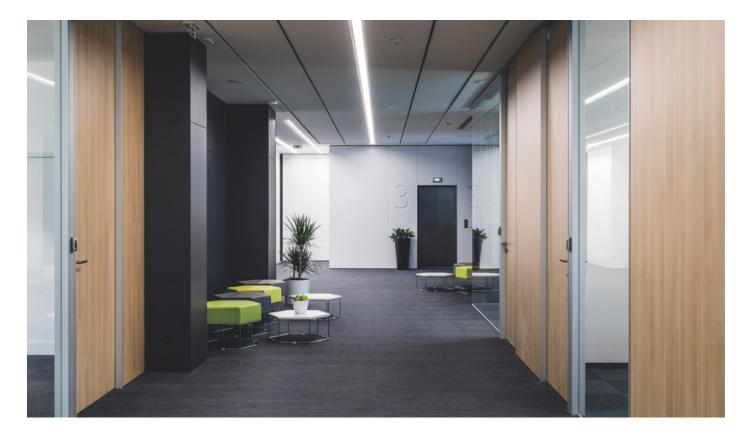





Graphic Green



Graphic Grey





tiles collection

500 mm x 500 mm 20 pcs./box (53.82 Sq. ft.)


MT - Urban



MT-Storm





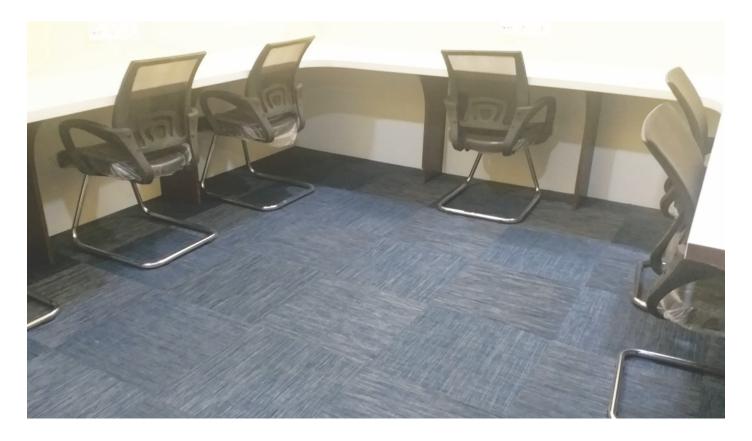



scale



570 mm x 550 mm 40 pcs./box (70.70 Sq. ft.)

Scale - Metallic



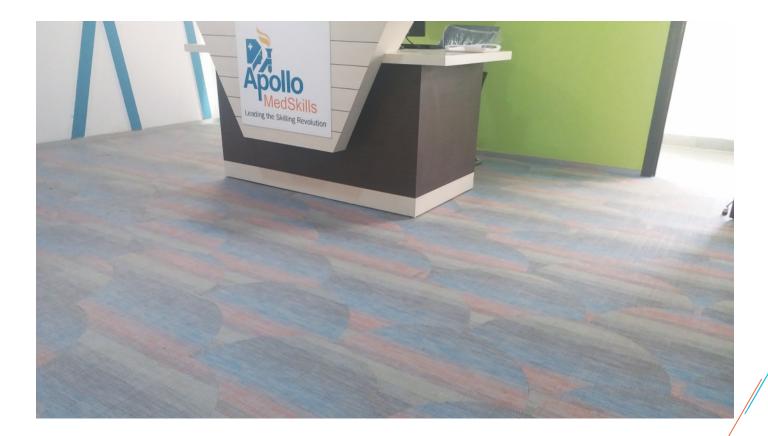

13

triangle COLLECTION



500 mm x 500 mm 40 pcs./box (46.60 Sq. ft.)






15

SPECIALITY AUDITORIUM FLOORS

Aesthetics and acoustics are one of the most commanding rules in the process of designing an auditorium. Due to the anticipated presence of a large gathering of people, it is necessary to make sure that the flooring is comfortable and prevents any accidents caused by friction.

Vibrant floors woven vinyl with rich weave texture and aesthetic of fabric/carpet floor looks ultimate designer floor covering for areas like auditoriums, home theaters etc. Vibrant floors woven vinyl having minimal maintenance with stain free, sound absorbent and bacteria free property.

The new generation floor covering material plays a significant role in cinema safety as the material is anti slippery, odor free too. Special comfort and sound absorption backing adds additional sound absorption and contributes towards better functionality of the auditorium. The new generation auditoriums deserve new generation floor coverings too and the search end with Vibrant Floors woven vinyl.

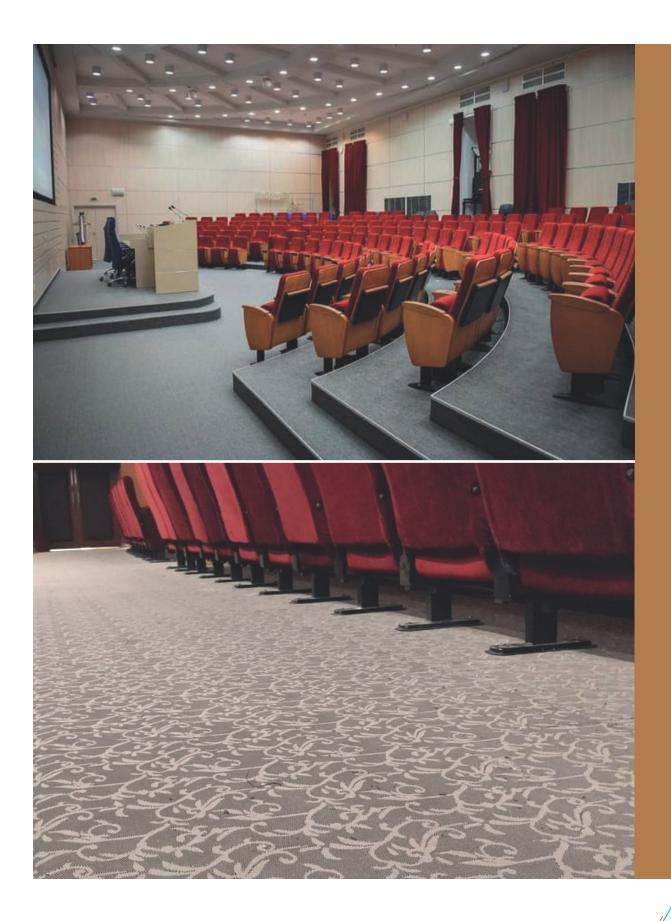

installation

REQUIREMENTS

- 1. The Vibrant Woven Vinyl Flooring is better to be installed by a professional installer.
- 2. The sub-flooring should be clean, dry and without cracks.
- 3. The best installation temperature must be higher than 15 centi-degree and the relative humidity not higher than 80%. A room temperature between 18°C (65°F) and 25°C (77°F).

PREPARATIONS

- 1. Cutting tools: Shovel/Safety knife/Cutting knife/Trowel
- 2. Cleaning tools: Vacuum/Mop cloth/Shoe cover/Mop/Broom
- 3. Glue: PVC glue/Cold welding liquid
- 4. Other tools: Sand/Heavy roller/Carpenter's ink market/floor rule/Scotch tape


INSTRUCTIONS (ROLLS)


- Apply self levelling compound, 24 hours prior to installation. This compound is then grinded and vacuum cleaned. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture.
- Roll the floor covering out, overlapping for about 5 cm and leave 24 hours to acclimatize. As P1
- Fold the back over half of their length (or width) draw a mark as start for the PVC glue application. Lay the Vibrant Woven Vinyl Flooring on the wet glue and use the heavy roller to remove all air bubbles.
- Use the cold welding liquid to weld the seams, prior to that put the scotch tape on the carpet, cut the tape using the seam. Then fit the seam by cold welding liquid. As P2
- 5. After few minutes, check the result.

P1 P2

INSTRUCTIONS (TILES)

- Apply self levelling compound, 24 hours prior to installation. This compound is then grinded and vacuum cleaned. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture.
- 2. Leave the tiles 24 hours to acclimatize.
- Measure the center of room and mark a line for the PVC glue application. Lay the Vibrant Woven Vinyl Tiles on the wet glue and use the heavy roller to remove all air bubbles. As P3 / P4
- 4. After few minutes, check the result.





care & maintenance

VIBRANT WOVEN VINYL FLOORING CARE AND MAINTENANCE

There should always be a well-functioning entrance system to ensure the majority of the dirt stays there. 85% of the dirt comes from the outside.

MECHANICAL CLEANING

- 1. Vacuum clean the flooring.
- 2. Clean the flooring with a scrubber-dryer machine with "soft" brush rollers. Use warm to the touch water with the minimum dose of all-purpose cleaner (PH7-8.5), to avoid having to rinse the flooring afterwards. It is an advantage to drive in the carpet's longitudinal direction.

MANUAL CLEANING

- 1. Vacuum clean the flooring.
- Use a scrubbing brush on a shaft. Dip the scrubbing brush in a bucket with warm to the touch water/all-purpose cleaner solution, PH 7-8.5, and scrub the floor.
- 3. Suck up the water with a wet vacuum cleaner, or dry the floor with soft cloth/micro-fibre cloth.

STAIN REMOVAL

Stains should be removed as soon as possible. When using a stain remover, check with the manufacturer that should not damage vinyl flooring. Use a scrubbing brush and always rinse with water.

Special : For chewing gum use - 1. Icy-spray, 2. Spot Eliminator

III 🔟 🖂

TECHNICAL INFORMATION		ROLLS	TILES	
Classification		EN 685	33	33
Weight	· ح	ISO 8543	2.7-3.1kg/m ²	3-3.5kg/m ²
Thickness	í ×	ISO 1765	2.5mm-2.8mm	2.5mm-2.8mm
Roll Length	R	EN 426	20-25m	-
Roll Width	(î)	EN 426	2m	-
Tile Dimension	\bigoplus	EN 994	-	50x50cm
Dimension Stability	רא עש	ISO 2551	< 0.25%	< 0.25%
Curvature		EN 434	< 2mm	< 2mm
Caster Chair	6	EN 985	Continuous use	Continuous use
Body Voltage	1	ISO 1815	≤ 2.0KV	≤ 2.0KV
Thermal Resistance		ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating
Colour Fastness to Light	- Fr	ISO 105-B02	> 6	> 6
Anti-slip property	DS	EN 13893	> 0.3	> 0.3
Reaction to Fire	Brist	EN13501-1	Bfl-s1	Bfl-s1
Smoke Density		ASTM E662	< 450	< 450
REACH Test		1907/2006	NO.(6614)008-1228-R2	
CE Certification	CE	EN14041 EN15114	NO. EC. 1282.OA140305.AYD0738	
ISO 9001 Certification		ISO 9001:2008	NO. 04514Q20096R0S	
ISO 14001 Certification		ISO 14001:2004	NO. 04514E20029R0S	



Sound Absorbent



Anti-bacterial



Unique & Limitless Designs



Stain, Water & Oil Resistant



Easy Installation



Hygienic

our esteemed clients

DLFA	MARKS <mark>&</mark> SPENCER	ΝΕΧΑ	DELHI INDIRA GANDHE DELHI INTERNATIONAL AIRPORT
Jaquar.	SYBASE [*]	SAP	GlobalL ogic °
HYATT	TAJ	Path Kind	НУШПОЛІ
ITC Limited	Deloitte.	HOSPITALS TOBEHING LIVES	
Webel opportunities infiniTe	Decmore		and
THERMAX	ALL RANK C	प्राण्याय अर्धनावनम् मिन् मिन्नियान् संस्थान्त्र	many more







WE ALSO OFFER
WOVEN VINYL WALLCOVERING I LUXURY VINYL TILE (LVT)



A-76, 2nd Floor, DDA Shed, Okhla Industrial Area, Phase-2, New Delhi - 110020 © 011-49043159

🛛 info@vibrantfloors.in 🛛 🌐 www.vibrantfloors.in

NEW DELHI • MUMBAI • BENGALURU • CHENNAI • HYDERABAD • AHMEDABAD KOLKATA • SURAT • PUNE • JAIPUR • LUCKNOW • LUDHIANA